



UX SERIES

BROCHURE

MSL15XUX
Electric Rider Stacker

1,500kg

MSL15XUX

The Yale® electric rider stacker MSL15XUX combines both features and reliable performance. This low-maintenance truck can help increase productivity and reduce operational costs.

PRODUCTIVITY

- Maintenance free AC motors
- Multi-function display with BDI and hour meter
- Handle equipped with emergency reversing device
- Auto deceleration function makes operation more productive
- Low speed switch
- Variable speed control
- Sideways battery removal is easy to maintain
- Cushioning for low-noise operation
- Built-in pressure relief valve protects from overloads and increases reliability
- Emergency power disconnect switch
- 240Ah traction battery
- Cold storage configuration (option)
- Narrow leg option for Australian market

OPTIMUM STRUCTURAL DESIGN

- Low centre of gravity enhances stability
- Full free lift mast options for low overhead clearance
- Durable plastic covers
- Adjustable balance caster wheel improves stability

SERVICEABILITY

- Low voltage protection setting prolongs battery life time
- CANbus technology reduces wiring complexity and increases reliability
- The simple electronic components makes troubleshooting and servicing more efficient
- Hall-effect sensors reduce wear and increase the component life



Handle (Standard)
(Left & Right Handed)



Adjustable
Straddle Legs




One Sided (Cold Store)




Two Sided (Cold Store)

LOAD CHARTS

LOAD CENTRE CHART


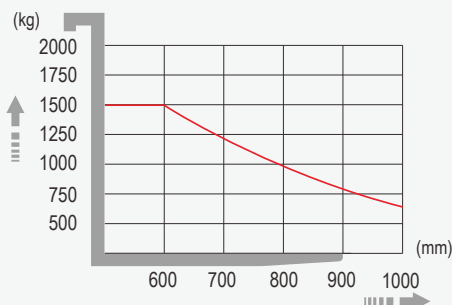


LOAD CAPACITY CHART

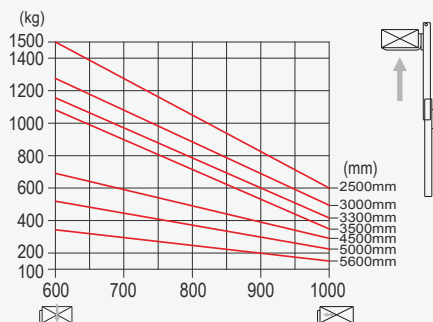

SPECIFICATIONS AND DIMENSIONS

Model	Measurement	MSL15XUX							
Load capacity	Q (kg)	1500							
Load centre distance	c (mm)	600							
Load distance, centre of drive axle to fork	x (mm)	697							
Fork height, lowered	h13 (mm)	70							
Wheelbase	y (mm)	1420							
Axle loading, laden front/rear	Kg	1440/1280							
Axle loading, unladen front/rear	Kg	870/350							
Tyres		polyurethane							
Tyre size, front	mm	Φ250×70							
Tyre size, rear	mm	Φ80×84							
Additional wheels (dimensions)	mm	Φ150×60							
Wheels, number front rear (x=driven wheels)		1x+1/4							
Tread, front	b10 (mm)	520							
Tread, rear	b11 (mm)	1040-1430							
Mast height lowered	h1 (mm)	1805	2055	2205	2305	2120	2280	2480	
Free lift	h2 (mm)	0	0	0	0	1570	1740	1940	
Max. lift height	h3 (mm)	2590	3090	3390	3590	4590	5090	5690	
Mast height extended	h4 (mm)	3025	3525	3825	4025	5080	5560	6160	
Height of tiller in drive position min./max.	h14 (mm)	1150/1450							
Overall length	l1 (mm)	2020							
Length to face of forks	l2 (mm)	962							
Overall width	b1 (mm)	1170-1560							
Fork dimensions	s/e/l (mm)	40/100/1070 (1150)							
Width overall forks	b5 (mm)	200-800							
Ground clearance, centre of wheelbase	m2 (mm)	35							
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2560							
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2545							
Turning radius	Wa (mm)	1695							
Steer motor		Mechanical				Electronic			
Drive motor power	kW	1.2				1.5			
Lift motor power	kW	3							
Sound lever at the driver's ear according to DIN12503	dB (A)	70							
Travel speed, laden/unladen	Km/h	6.5/6.7							
Lift speed, laden/unladen	m/s	0.11/0.15							
Lowering speed, laden/unladen	m/s	0.12/0.12							
Max. gradeability, laden/unladen	%	8/15							
Service brake		Electromagnetic							
Battery voltage, nominal capacity K5	V/Ah	24/240							
Battery weight	Kg	220							
Battery dimensions l/w/h	mm	675x254x500							
Service weight (without battery)	Kg	1200/1225/1240/1250/1300/1320/1340							

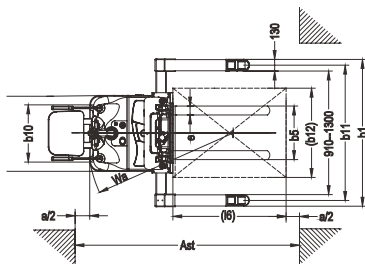

MSL15XUX POWER PLUG TYPE



A

Power Plug



F

Power Plug



G

Power Plug



I

Power Plug

About Yale



Yale Lift Truck Technologies leverages over a century of material handling experience and substantial investment in innovation to bring the most advanced technology-driven lift truck solutions to market. The company offers a full line of award-winning lift trucks, including reach trucks, order pickers, turret trucks, pallet jacks and trucks, pallet stackers, tow tractors and counterbalanced forklifts, as well as powerful operator assist solutions, proven robotics and a wide range of power sources to help customers adapt to today's demanding supply chain. Yale and its independent dealer network support these solutions with comprehensive after-sales service, parts, financing and training.

Yale Lift Truck Technologies is a trading name of Hyster-Yale Asia-Pacific Pty Ltd., a wholly owned subsidiary of Hyster-Yale Materials Handling, Inc. (NYSE:HY) which is headquartered in Cleveland, Ohio and operates globally.

MATERIALS HANDLING FOR:

3PL

Auto Parts Distribution

Beverage

Cold & Frozen Foods

Food Distribution

Food Processing

Furniture & Furnishings

Government

Health & Pharma

Home Centers

Retail & E-commerce

Yale Pacific

1/23 Rowood Road, Prospect NSW 2148


Tel: +61 (2) 9795 3800 | Fax: +61 (2) 9792 8484

Yale Asia

16 Tuas Avenue 20, Singapore 638827

Tel: +65 6863 3387 | Fax: +65 6863 3349

yale.com

© 2023 Hyster-Yale Group, Inc., all rights reserved. YALE and  are trademarks of Hyster-Yale Group, Inc. Trucks may be shown with optional equipment and/or features not available in all regions. Specifications and details in this brochure are subject to change without prior notification.